




<http://dovre.be>

## Technical Data: 250CB/B

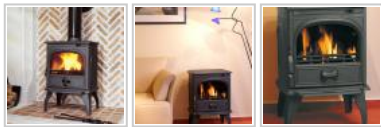

<b>Product name:</b>	250CB/B
<b>Series</b>	250
<b>Type</b>	freestanding
<b>Style</b>	classic
<b>Combustible</b>	wood, lignite
<b>code:</b>	01.94705.021
<b>Dimensions WxHxD:</b>	455x645x405 mm
<b>Weight:</b>	80 kg
<b>Length of logs:</b>	30 cm
<b>Nominal performance:</b>	6 kW
<b>Minimum performance:</b>	2 kW
<b>Maximum performance:</b>	8 kW
<b>Capacity:</b>	120 m <sup>3</sup>
<b>Efficiency:</b>	83 %
<b>CO emissions (13% O<sub>2</sub>):</b>	0.1 %
<b>Dust particles:</b>	36 (mg/Nm <sup>3</sup> )
<b>Ø connection:</b>	125 mm
<b>Height of connection:</b>	495 mm
<b>Location connection:</b>	connection on top or rear
<b>Minimum pression:</b>	12 mbar
<b>Flue gas volume:</b>	6.4 g/s
<b>Distance from flammable objects: behind:</b>	200 mm
<b>Distance from flammable objects: side:</b>	200 mm
<b>Distance from flammable objects: front:</b>	800 mm
<b>Heat shield:</b>	inclusive
<b>Floor:</b>	refractory bottom with ash hatch
<b>Ashtray:</b>	inclusive

